



## Case Study: Furniture

### Low Haeckel Cabinet


**Industry:**  
Furniture

**Location:**  
Gloucester, VA


**Architect:**  
Louise Hibbert and Douglas Finkel

When looking for a beautiful, sustainable, and consistent material, wood artists Louise Hibbert and Douglas Finkel decided on Plyboo edge grain amber plywood to craft their Low Haeckel Cabinet. Copper line art over lovely panes of glass complete this cabinet's elegant look.

Shown here is a close-up of the copper and glass design--a harmonious match for amber edge grain!

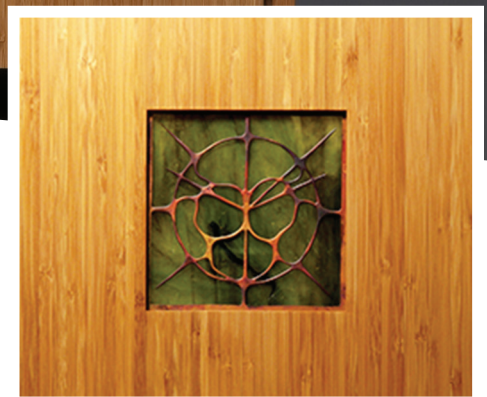

#### Materials Used:




Amber Edge Grain  
Bamboo Plywood  
BP-V4896A-NAUF/FSC



## Specifications

### Possible LEED Credits:

Low emitting materials and certified wood

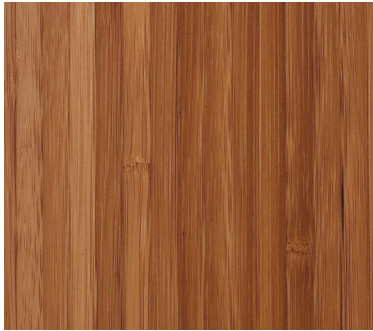

### Physical / Mechanical Properties - Edge Grain Bamboo Plywood

Dimensions:	3/4" x 48" x 96" 19mm x 1219mm x 2438mm (*mm tolerance +/- .5mm thickness)
Construction:	Three-ply, cross core construction.
Working with Plyboo:	A worksheet is provided with each panel containing useful tips and information and is also available on our website at <a href="http://plyboo.com/downloads">plyboo.com/downloads</a> .
ASTM E84: Surface Burning	Class C
ASTM D1037: Dimensional Stability	<ul style="list-style-type: none"> <li>•Linear Expansion (3-ply): Parallel -0.04% / Perpendicular -0.07%</li> <li>•Thickness Swell (3-ply): -0.13%</li> </ul> Screw Hold (3-ply) (face/back/edge) <ul style="list-style-type: none"> <li>• 742 lbs/ 831 lbs/ 860 lbs average</li> </ul>
ASTM D4442: Moisture Content	6-9% average
ASTM D 6007-02: Formaldehyde Concentration in Air from Wood Products, small chamber test	Plyboo = 0.004 ppm (surpasses CARB II standards, 0.05ppm & ULEF standards of 0.04ppm)