


plybooQuiet™



PlybooQuiet™ PQ-19

FSC® Certified
FloorScore® Certified
Formaldehyde Free

- Noise Reduction .125" Padding
- L.E.E.D. Contributions: MR4, MR6, MR7, IEQ4
- Average Hardness greater than Maple
- Greater Dimensional Stability than Maple
- Precision Milling, Fit, and Finish
- 6' Lengths
- 25 year warranty
- **Soybond** Formaldehyde Free Manufactured Flooring

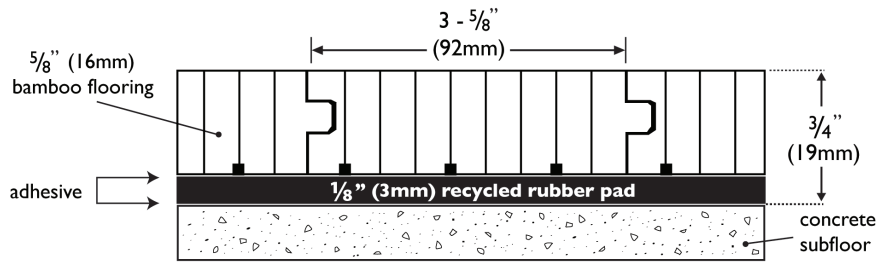

Plank Dimensions: 5/8" x 3 5/8" x 72"



Edge Grain, Amber
FL-V5872PA-NAUF/FSC
[Pre-finished]
FL-V5872UA-NAUF/FSC
[Unfinished]



Flat Grain, Amber
FL-5872PA-NAUF/FSC
[Pre-finished]
FL-5872UA-NAUF/FSC
[Unfinished]



Edge Grain, Natural
FL-V5872PN-NAUF/FSC
[Pre-finished]
FL-V5872UN-NAUF/FSC
[Unfinished]




Flat Grain, Natural
FL-5872PN-NAUF/FSC
[Pre-finished]
FL-5872UN-NAUF/FSC
[Unfinished]

PlybooQuiet™ Strand PQ-18

FSC® Certified
FloorScore® Certified
Urea Formaldehyde Free

- Noise Reduction .125" Padding
- L.E.E.D. Contributions: MR4, MR6, MR7, IEQ4
- Average Hardness greater than Maple
- Greater Dimensional Stability than Maple
- Precision Milling, Fit, and Finish
- 6' Lengths
- 25 year warranty
- PlybooPure, No Added Urea-Formaldehyde

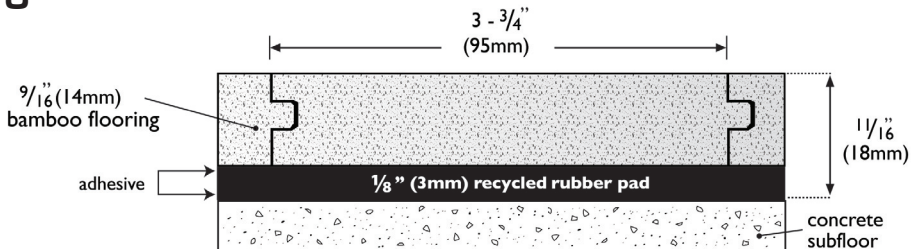


Plank Dimensions: 9/16" x 3 3/4" x 72"



Neopolitan
Inquire for Pre-finished
FL-P5872UNEO-NAUF/FSC
[Unfinished]



PlybooStrand Sahara
FL-P5872PH-NAUF/FSC
[Pre-finished]
FL-P5872UH-NAUF/FSC
[Unfinished]




PlybooStrand Havana
FL-P5872PD-NAUF/FSC
[Pre-finished]
FL-P5872UD-NAUF/FSC
[Unfinished]

PlybooQuiet™ Strand PQ-13

FSC® Certified
FloorScore® Certified
Urea Formaldehyde Free

- Noise Reduction .125" Padding
- L.E.E.D. Contributions: MR4, MR6, MR7, IEQ4
- Average Hardness greater than Maple
- Greater Dimensional Stability than Maple
- Precision Milling, Fit, and Finish
- 3' Lengths
- 25 year warranty
- PlybooPure, No Added Urea-Formaldehyde

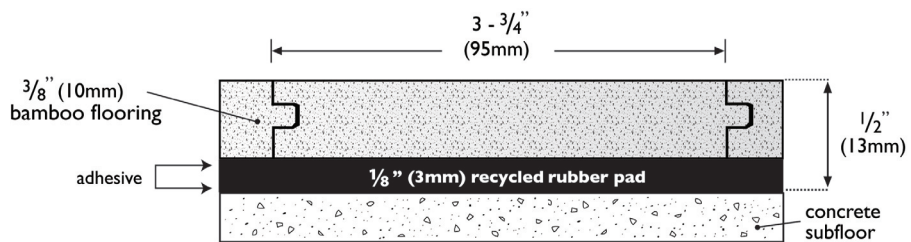


Plank Dimensions: 3/8" x 3 3/4" x 36"



Neopolitan
FL-P3836NEO-NAUF/FSC
[Pre-finished]






PlybooStrand Sahara
FL-P3836PH-NAUF/FSC
[Pre-finished]



PlybooStrand Havana
FL-P3836PD-NAUF/FSC
[Pre-Finished]

plybooQuiet™



FL-5872PPN-NAUF

FL-5872PPN-SG-NAUF

FL-P5872-PPE-NAUF

FL-P5872PPN-NAUF

FL-P5872PPD-NAUF

FL-V5872PPN-SG

FLAT GRAIN COCONUT

FLAT GRAIN SUGAR

FLAT GRAIN EBINY


EDGE GRAIN COCONUT

FLAT GRAIN COCONUT DARK

DECO PALM SUGAR

PlybooQuiet – PQ19 PALM

End View Detail

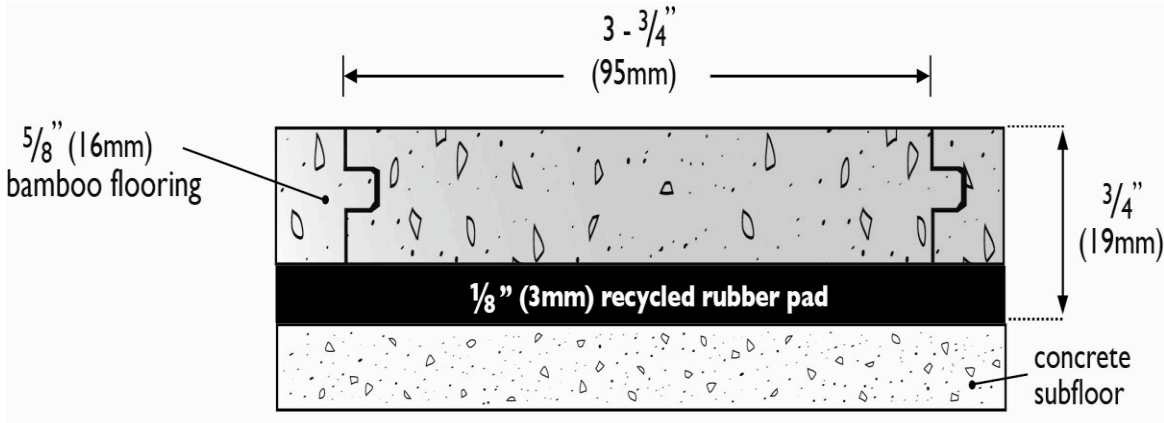

Top View Detail




System Components

System Components		Profile		
top	Durapalm Athletic Surface 5/8"x3"x 24" to 72" (16mm x 76m x 610mm to 1828mm)	0.625"	5/8"	16mm
base	1 layer of 1/8" PlybooFit sports padding (93% post consumer content recycled rubber padding)	0.125"	1/8"	3mm
TOTAL		0.750"	3/4"	19mm

System Description :

L.E.E.D. contributors	MRc7 : Certified Wood ; FSC Palm					
	MRc7 : FSC sub-floor : installer supplied)					
	MRc3 : Reclaimed Agrifiber (recovered Palm tree turnck)					
	MRc4 ; Recycled Content : 95% post consumer content recycled rubber padding					
	IEQc4.3 : Low emitting materials (manufacturing) + FloorScore Certified – section1350					
	IEQc4.1,4.2, 4.4 Low emitting materials (installer supplied)					
ID : Innovation in Design						
Colors (6)	Flat Grain Coconut	Flat Grain Sugar	Flat Grain Coconut Dark	Flat Grain Ebony	Edge Grain Ebony	DecoPalm Sugar
Finishes (1)	Prefinished					
System Type	Fixed resilient (glue down)					
Subfloor Construction	PlybooQuiet - acoustical padding (93% post consumer content recycled rubber) –					
Resilience	PlybooQuiet- acoustical padding – 45 duro – product # PFR45B					
System Profile Slab Depression	3/4"		0.750"		19mm	
Sound Impact Insulation	IIC rating = 54 (over 6" concrete)				IIC rating = 58 (over 6" concrete/6" fiberglass)	
Industry Compliance	Fitness		Exercise		Yoga	
Environmental Certifications	FSC		L.E.E.D		FloorScore	
Warranty	25 years					



AmberSquared
FL-EG-5836PA
FL-EG-5836UA-NAUF/FSC


NaturalSquared
FL-EG5836PN
FL-EG5836UN-NAUF/FSC

Foundation Brown Squared
FL-EG5836FB

Luminous Gray Squared
FL-EG5836LG

BambooQuiet Squared : BQ19-Squared

End View Detail

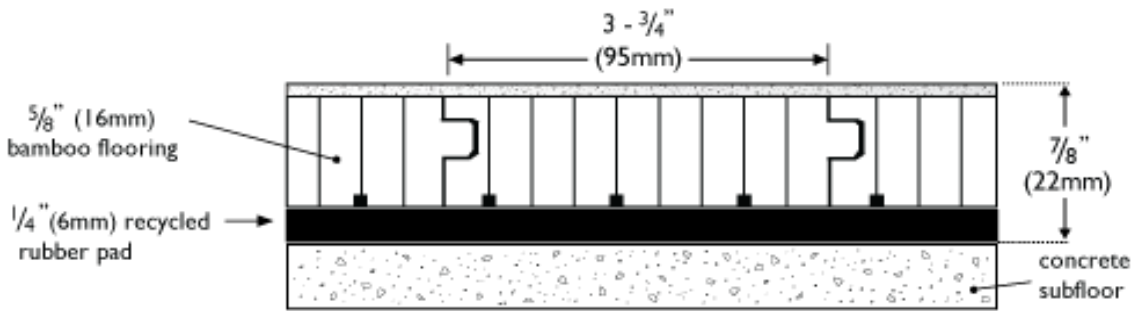

Top View Detail



System Components :

Top	Plyboo bamboo surface 16mm x 95 mm x 960mm Amber and Natural Squared	16mm
Base	1 layer of 3mm BambooQuiet acoustical padding + chemical DPM painted onto concrete	3mm
	TOTAL	19mm


System Description :

L.E.E.D. contributors	MRc7 : Certified Wood : 100% FSC : Bamboo			
	MRc6 : Rapidly Renewable			
	IEQc4.3 : Low emitting materials (manufacturing) FloorScore certified, CA section 01350 tested			
	IEQc4.1,4.2, 4.4 (installer supplied)			
	IEQc6.1,6.2 (recycled content : 93% post consumer content (recycled rubber padding))			
	ID Innovation in Design + FloorScore certified			
Colors (4)	Amber Squared FL-EG5836PA FL-EG5836UA	Natural Squared FL-EG5836PN FL-EG5836UN	Foundation Brown Squared FL-EG5836FB (prefinished only)	Luminous Gray Squared FL-EG5836LG (prefinished only)
Finishes (2)	Jobsite finished = UN or UA		Prefinished = PN or PA	
System Type	Fixed resilient (glue down)			
Subfloor Construction	PlybooQuiet - acoustical padding (93% post consumer content recycled rubber) -			
Resilience	PlybooQuiet- acoustical padding - 45 duro (93% post consumer content recycled rubber) - product # PFR45B			
System Profile Slab Depression	3/4"	0.750"	19mm	
Industry Compliance	Fitness	Exercise	Yoga	Stage Dance
Environmental Certifications	FSC		L.E.E.D	FloorScore
Warranty	25 years			


plybooQuiet™



FL-P5872SG/CL-NAUF/FSC
CERUSED TAUPE




FL-P5872EPD/CL-NAUF/FSC
CERUSED ECLIPSE



FL-P5872WPH/CL-NAUF/FSC
CERUSED PEARL



FL-P5872EPDPC-NAUF/FSC
CERUSED ESPRESSO




FL-P5872PDA/CL-NAUF/FSC
BRUSHED SAHARA



FL-P5872PDA/CL-NAUF/FSC
BRUSHED HAVANA

PlybooQuiet – PQ18-StilettoClic

End View Detail

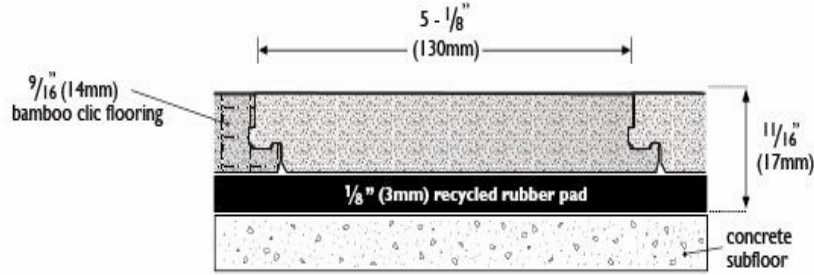

Top View Detail



System Components		Profile		
top	StilettoStrand Bamboo Surface 9/16"x5 1/8"x 72" (16mm x 130mm x 1,830mm)	0.562"	9/16"	14+mm
base	1 layer of 1/8" PlybooFit sports padding (93% post consumer content recycled rubber padding)	0.125"	1/8"	3mm
TOTAL		0.687"	11/16"	18mm

System Description :

L.E.E.D. contributors	MRc7 : Certified Wood ; 100% FSC Bamboo					
	MRc7 : FSC sub-floor : installer supplied)					
	MRc6 : Rapidly Renewable Resource : (5 year forest replenishment – harvest)					
	MRc4 ; Recycled Content : 95% post consumer content recycled rubber padding					
	IEQc4.3 : Low emitting materials (manufacturing) + FloorScore Certified – section1350					
	IEQc4.1,4.2, 4.4 Low emitting materials (installer supplied)					
	ID : Innovation in Design					
Colors (6)	Cerused Taupe FL-P5872SG-CL	Cerused Eclipse FI-P5872EPD/CL	CerusedPearl FL-P5872WPH-CL	Cerused Espresso FL-P5872EPDPC-	Brushed Sahara FL-P5872PDA-CL	Brushed Havana FL-P5872PDA-CL
Finishes (2)	Prefinished					
System Type	Floating reeilient					
Subfloor Construction	PlybooQuiet - acoustical padding (93% post consumer content recycled rubber)					
Resilience	PlybooQuiet- acoustical padding – 45 duro – product # PFR45B					
System Profile Slab Depression	11/16"	0.687"		18mm		
Sound Impact Insulation	IIC rating = 54 (over 6" concrete)			IIC rating = 58 (over 6' concrete/6" fiberglass)		
Industry Compliance	Fitness	Exercise	Yoga	Stage	Dance	
Environmental Certifications	FSC		L.E.E.D	FloorScore		
Warranty	25 years					


PlybooQuiet : www.plybooquiet.com : 866.835.9859 : info@plyboo.com

plybooQuiet™




PlybooQuiet : PQ18 Strand | PQ18-StrandClic

End View Detail : PQ18-Strand

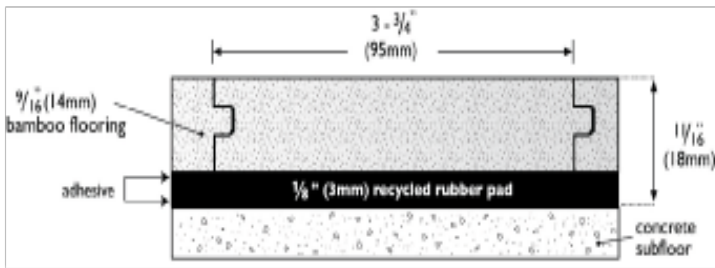

End View Detail : PQ18-StrandClic

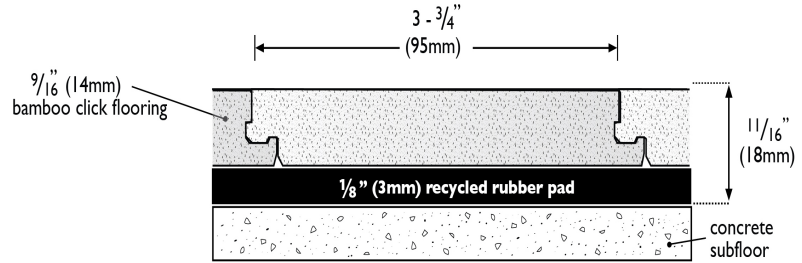

System Components :

		Profile		
top	Plyboo Strand Bamboo : 9/16" surface 9/16"x3 3/4"x72" (40mm x 95mm x 1830mm)	0.562"	9/16"	14mm
base	1 layer of 1/8" PlybooQuietCush acoustical padding (93% post consumer content recycled rubber) – PQR-45B	0.125"	1/8"	3mm
TOTAL		0.687"	11/16"	17.5mm

System Description :


L.E.E.D contributors	MRC7 : Certified Wood : 100% FSC Bamboo		
	MRC6 : Rapidly Renewable Resource (5.5 year forest replenishment – harvest)		
	MRC4 : Recycled Content : 93% post consumer content recycled rubber pad		
	IEQc4.3 : Low emitting materials (manufacturing) + FloorScore certified, CA section 01350		
	IEQc4.1,4.2,4.4 : Low emitting materials (installer supplied)		
ID : Innovation in Design			
Colors (3)	Havana Strand FL-P5872PD-NAUF/FSC FL-P5872PD-CL-NAUF/FSC	NeopolitanStrand FL-P5872NEO-NAUF/FSC FL-P5872NEO-CL-NAUF/FSC	SaharaStrand FL-P5872PH-NAUF/FSC FL-P5872PH-CL-NAUF/FSC
Finishes (1)	9/16" x 3-3/4" x 72" Plyboo Strand : available pre-finished		
System Type	Fixed resilient (glue down)		Floating resilient (clic-loc)
Subfloor Construction	PlybooQuiet – acoustical padding (93% post consumer content recycled rubber)		
Resiliance	PlybooQuiet – acoustical padding – 45 duro – Product # PQR-45B		
System Profile	11/16"	0.687"	18mm
Sound Impact Insulation	IIC = 54 (over 6" concrete)		IIC= 58 (over 6" concrete / 6" fiberglas)
Environmental Certifications	FSC	FloorScore	L.E.E.D
Warranty	25 years		

PlybooQuiet | www.plybooquiet.com | 866.835.9859 | sales@plyboo.com




PlybooQuiet : PQ-13 Strand | PQ13-StrandClic

End View Detail : PQ-13 Strand

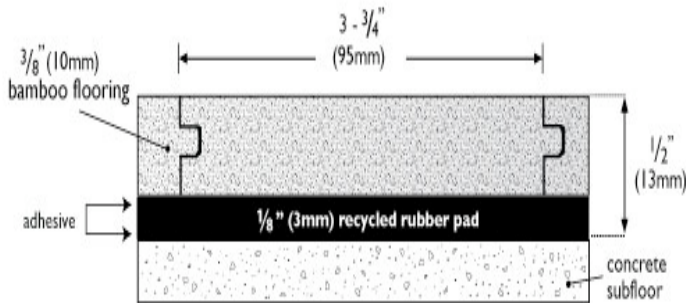

End View Detail : PQ-13 StrandClic

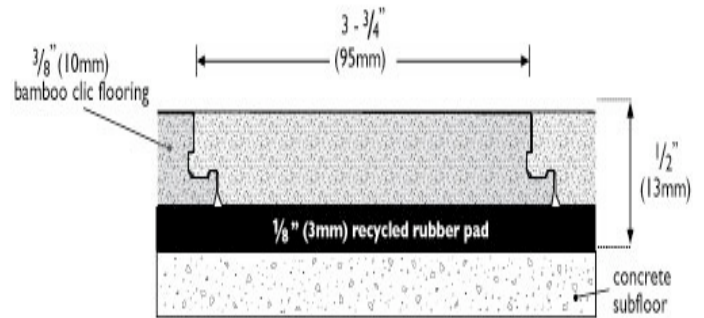

System Components :

System Components :		Profile		
top	Plyboo Strand Bamboo : 3/8" surface 3/8"x3 3/4"x36" (10mm x 95mm x 915mm)	0.375"	3/8"	10mm
base	1 layer of 1/8" PlybooQuiet acoustical padding (93% post consumer content recycled rubber) – PQE-45B	0.125"	1/8"	3mm
	TOTAL	0.500"	1/2"	13mm

System Description :

L.E.E.D contributors	MRc7 : Certified Wood : 100% FSC Bamboo		
	MRc6 : Rapidly Renewable Resource (5 year forest replenishment – harvest)		
	MRc4 : Recycled Content : 93% post consumer content recycled rubber pad		
	IEQc4.3 : Low emitting materials (manufacturing) + FloorScore certified, CA section 1350 tested		
	IEQc4.1,4.2,4.4 : Low emitting materials (installer supplied)		
ID : Innovation in Design			
Colors (3)	Havana Strand FL-P3836PD-NAUF/FSC FL-P3836PD-CL-NAUF/FSC	NeopolitanStrand FL-P3836NEO-NAUF/FSC FL-P3836NEO-CL-NAUF/FSC	SaharaStrand FL-P3836PH-NAUF/FSC FL-P3836PH-CL-NAUF/FSC
Finishes (1)	3/8" x 3-3/4" x 36" Plyboo Strand : available pre-finished only		
System Type (2)	Fixed resilient (glue-down)	Floating resilient (clic-loc)	
Subfloor Construction	PlybooQuiet – acoustical padding (93% post consumer content recycled rubber)		
Resilience	PlybooQuiet – acoustical padding – 45 duro – Product # PQR-45B		
System Profile	1/2"	0.500"	13mm
Sound Impact Insulation	IIC rating = 54 (over 6" concrete)	IIC rating = 60 (over 6" concrete / 6" fiberglass ceiling)	
Environmental Certifications	FSC	FloorScore	L.E.E.D.
Warranty	25 years		

PlybooSport is:

Soybond Manufactured FSC® and FloorScore® Certified Formaldehyde Free

- L.E.E.D. Contributions: MR6, MR7, IEQ4
- Average Hardness greater than Maple
- Consistent lighter color and 6' lengths
- Precision Milling, Fit, and Finish
- Exceeds visual rating of Grade 1 Maple
- Priced competitively to Grade 1 Maple
- ASTM, EN, FIBA, DIN Compliant
- 25 year warranty



Edge Grain, Natural
FL-V3472SFN-NAUF/FSC



Edge Grain, Amber
FL-V3472SFA-NAUF/FSC
(minimum order 2,500 sq. ft.)

Dimensions:

U.S. Standards/ Metric

3/4" x 2 1/4" x 72" (19mm x 57mm x 1829mm)

1 1/4 sq. ft./board (0.104 m²/board)

20 boards/box

22.5 sq. ft./box (2.09 m²/box)

Weight:

U.S. Standards/ Metric

2.53 lbs./sq. ft. (1.235 kg/m²)

2.85 lbs./board (1.29 kg/board)

57 lbs./box (25.9 kg/box)

50 boxes/pallets

2,930 lbs/pallet (1,329 kg/pallet)

L.E.E.D. Contributions

Manufacturer:

MRc4: Recycled Materials (Rubber Pad)

MRc6: Rapidly Renewable Materials

MRc7: FSC® Certified (SW-COC-003124)

IEQc4.3: Low-Emitting Materials

CA Section 01350 Compliant

FloorScore® Certified (SCS-FS-02130)

Installer Supplied:


MRc7: FSC-Certified Subfloor Materials

IEQ 4.1, 4.2: Low-Emitting Materials

Floating Resilient Sleeper

PS-3.125-CP

- SOFT TOUCH-Y
- MULTI-USE-W
- PRO-B

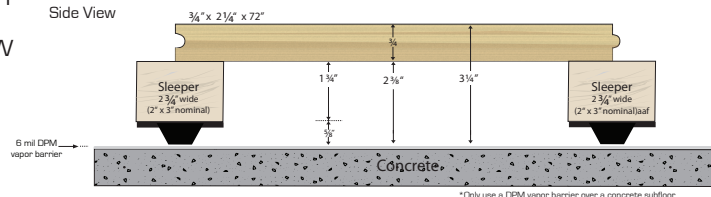


*Only use a DPM vapor barrier over a concrete subfloor

Floating Resilient Sleeper + Panel

PS-3.625-CP

- SOFT TOUCH-Y
- MULTI-USE-W
- PRO-B

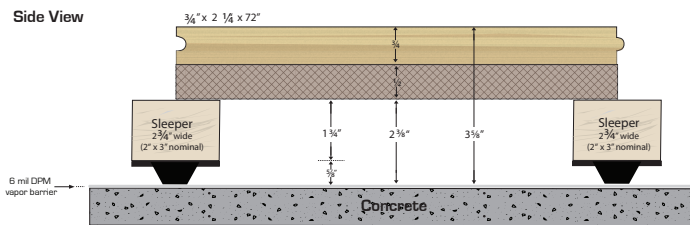


*Only use a DPM vapor barrier over a concrete subfloor

Floating Resilient Panel

PS-1.875CP, PS-1.937-CP, PS-2.125-CP, PS-2.375-CP


- SOFT TOUCH-Y
- MULTI-USE-W
- PRO-B

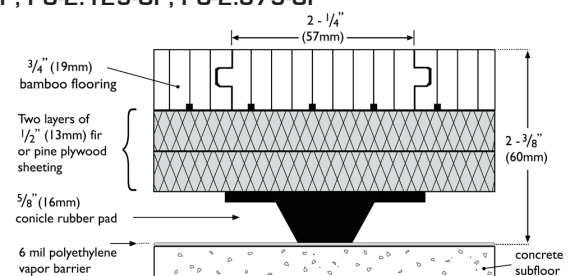

Fixed Resilient Anchored

PS-2.125A-CP; PS-2.375A-CP

- SOFT TOUCH-Y
- MULTI-USE-W
- PRO-B

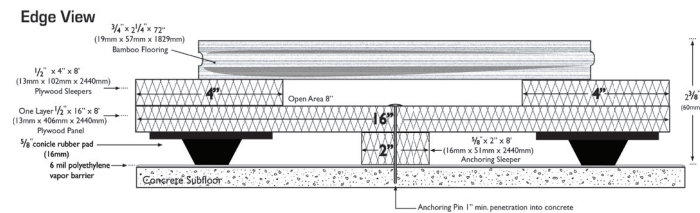

Fixed Resilient PlybooFIT

PF-3472-1.0

